

# UC7018

## Multi-Signal to USB3.0 Capture Box

## 1. Simplification

UC7018 Multi-signal to USB 3.0 capture box is a broadcast-grade, professional, and convenient device designed for capturing uncompressed SDI/HDMI/DVI-I/VGA/CVBS/S-VIDEO/YPbPr input signals via USB 3.0 for audio/video capture, live streaming, and recording on a computer. It supports video resolutions up to 1080p60Hz and is compatible with various systems, including Windows and Linux. UC7018 is ideal for live broadcasting, streaming, professional audio and video work, web conferencing, video production.



## 2. Main features


- Input: SDI/HDMI/DVI-I/VGA/CVBS/S-VIDEO/YPbPr input, analog audio input
- Output: USB 3.1 Gen1 (USB3.0) output
- Automatic input signal detection up to 1080p60
- Plug and play, no driver or power supply required
- Uncompressed audio and video capture, UVC and UAC compliant, supports RGB, YUY2, NV12
- With video and power signal LED indicators
- USB Type-C for capture, power and upgrades
- Easily controlled by dip switches and PC software
- Compatible with Windows, Linux and MacOS.
- Compatible with OBS, ZOOM, Teams, Twitch, Vmix and other live streaming softwares.

### 3.Specification

| INTERFACE                                   |   |
|---|---|
| Video Interface                             | 1×SDI input<br>1×HDMI input<br>1×DVI-I/VGA input<br>1×S-VIDEO/CVBS/YPBPR input<br>1×3.5mm (analog audio input)                      |
| Output Interface                            | 1×USB3.0 type C(USB 3.1 Gen1, up to 200MB/s)  |
| FORMAT                                      |   |
| SDI Input Format                            | 1080p 60/59.94/50/30/29.97/25/24/23.98<br>1080sf 30/29.97/25/24/23.98<br>1080i 50/59.94/60<br>720p 60/59.94/50/30/29.97/25/24/23.98 |
| HDMI Input Format                           | 1080p 60/59.94/50/30/29.97/25/24/23.98<br>1080i 50/59.94/60<br>720p 60/59.94/50/30/29.97/25/24/23.98                                |
| S-VIDEO/CVB Input Format                    | 710×484i, 702×576i  |
| YPBPR Input Format                          | 1920×1080p, 1920×1080i, 1280×720p, 1024×576p, 720×576p, 720×483p, 710×484i, 702×576i  |
| DVI Input Format                            | 1920×1080, 1600×1200, 1280×1024, 1280×960, 1280×720, 1152×900, 1152×870, 1152×864, 1024×768, 800×600, 720×400, 640×480, 640×400     |
| VGA Input Format                            | 1920×1080, 1600×1200, 1280×1024, 1280×960, 1280×720, 1152×900, 1152×870, 1152×864, 1024×768, 800×600, 720×400, 640×480              |
| USB Capture Resolution                      | 1920×1080, 1600×900, 1440×900, 1368×768, 1280×960, 1280×720, 1024×768, 960×540, 800×600, 640×360                                    |
| Audio & Video Capture                       | UVC (USB Video Class) Standard<br>UAC (USB Audio Class) Standard  |
| Audio Codec                                 | 2 channel, 16 bit PCM, 48kHz, 1536 kbps   |
| Video Color Space                           | RGB, YUY2, NV12   |
| OPERATING SYSTEM AND SOFTWARE COMPATIBILITY |   |
| Supported Operating Systems                 | Windows 7/8/10/11, Linux (kernel version 2.6.38 and above), macOS (10.8 and above)  |
| Software Compatibility                      | OBS studio, Skype, ZOOM, Teams, Google Meet, Youtube Live, QuikcTime Player, Face time, etc.  |

|                       |  |
|-----------------------|--|
| Compatible SDK        | DirectShow(Windows), DirectSound(Windows)  |
| <b>POWER</b>          |  |
| Power                 | USB Type-C   |
| power Consumption     | ≤5W (5V, 1A)   |
| Voltage               | 5V   |
| <b>OTHER</b>          |  |
| Dimension             | 104×125.5×24.5mm   |
| Weights               | Net weight: 473g Gross Weight: 830g  |
| Operating Temperature | -20~60°C   |
| Storage Temperature   | -30~70°C   |
| Relative Humidity     | 20~90% RH (non-condensing)   |
| Warranty              | 3 years  |
| <b>ACCESSORY</b>      |  |
| Accessory             | 1×USB3.0 A to C Cable, 1×DVI to VGA Adapter<br>1×S-Video/CVBS/YPBPR 3-in-1 Cable, Bracket (Optional) |

## 4. Interfaces

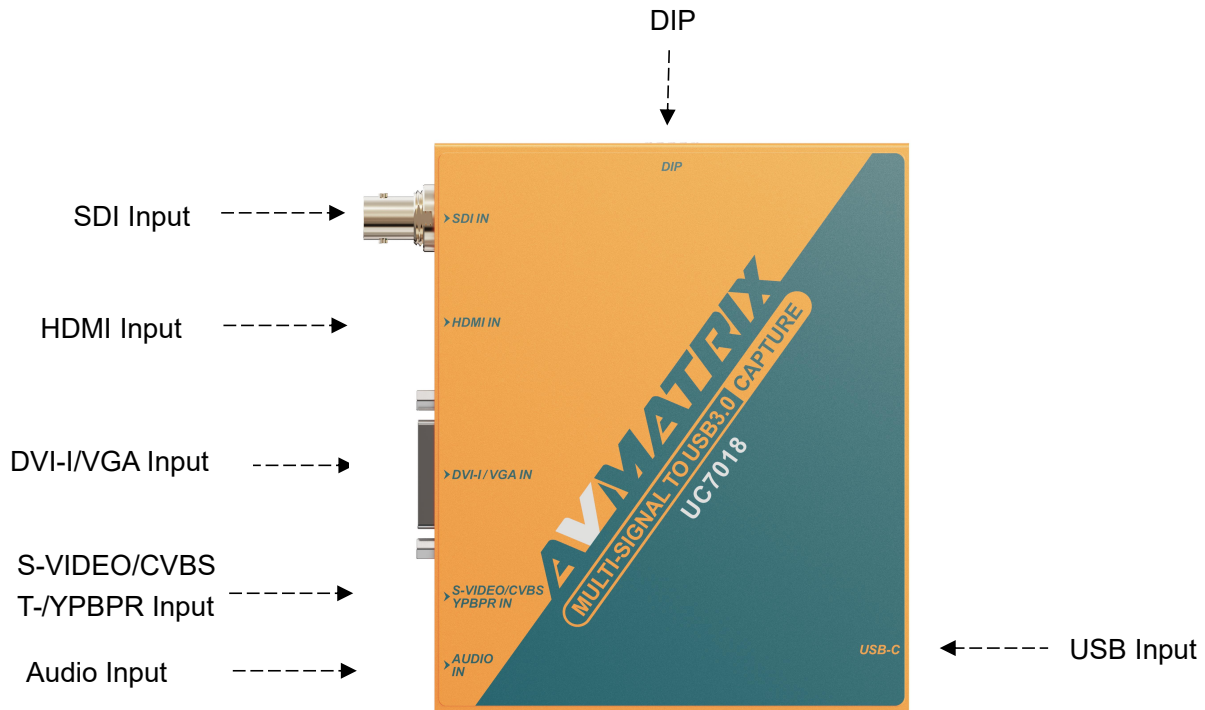

## 5. Operating Instructions

UC7018 is based on the UVC (USB Video Class) and UAC (USB Audio Class) standards. No additional drivers need to be installed. After installation in the operating system, the relevant video and audio devices will be added. For example, in the Windows Device Manager, new devices will appear

- Under Camera: Switcher Capture
- Under Audio Input and Output: Switcher Capture

## 6. Audio Inputs

UC7018 capture box has Line audio inputs, making audio configuration more flexible.

## 7. Output

**USB3.0 Capture Output:** Using third-party software such as OBS, Vmix, Zooms, Teams, Potplayer, etc. Capture SDI/HDMI/DVI-I/VGA/CVBS/S-VIDEO/YPbPr input video for live game broadcasting, broadcasting, vlogging, distance education, conference and other live events. Captured video resolution up to 1080p60.

## 8.Dip Switch

UC7018 SDI/ HDMI to USB3.0 Video Capture DIP switch provides the following settings (1=ON, 0=OFF):

| Multi-signal to USB3.0 Capture Box |     |     |     |                 |     |
|------------------------------------|-----|-----|-----|-----------------|-----|
| DIP SWITCHES (1=ON, 0=OFF)         |     |     |     |                 |     |
| Video In                           | SW1 | SW2 | SW3 | Audio In        | SW4 |
| SDI                                | 1   | 1   | 1   | Follow Video In | 1   |
| HDMI                               | 1   | 1   | 0   | Analog Audio    | 0   |
| DVI                                | 1   | 0   | 1   | Controls        | SW5 |
| VGA                                | 1   | 0   | 0   | DIP             | 1   |
| YPbPr                              | 0   | 1   | 1   | PC              | 0   |
| S-Video                            | 0   | 1   | 0   |                 |     |
| CVBS                               | 0   | 0   | 1   |                 |     |

### 1.DIP SW 1-3 -Video Input

Setting switch to select video input source SDI/HDMI/DVI-I/VGA/CVBS/S-VIDEO/YPbPr.

### 2.DIP SW 4 Audio Input

Set the switch for the incoming audio to follow the video or analog plus embedding.

When set to 1, the input audio follows the video input.

When set to 0, the input audio follows the video analog plus embedding.

### 3.DIP SW 5 Control

Setting switch to select dial code control or PC software control.


When set to 1, dial code control.

When set to 0, connect to USB and control with PC control software.


## 9.OBS & Potplayer Operating Instructions

- **OBS Software Setup:**


**Step 1:** Open OBS Studio , click “+” and select “Video Capture Device”

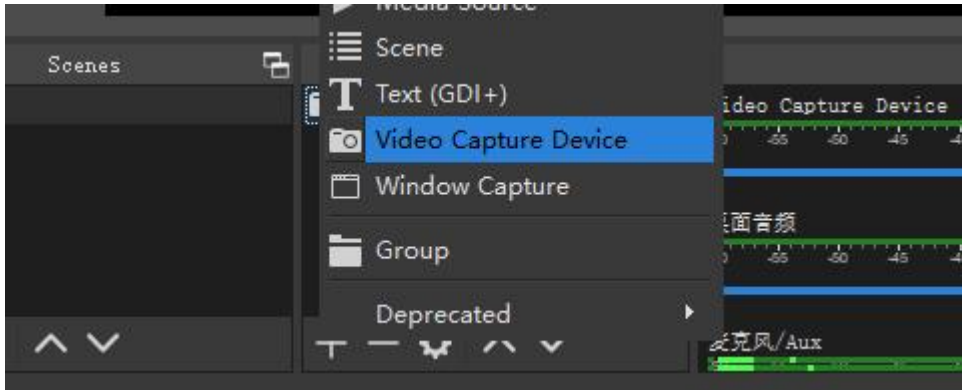

Rename the name of the signal source and click OK.

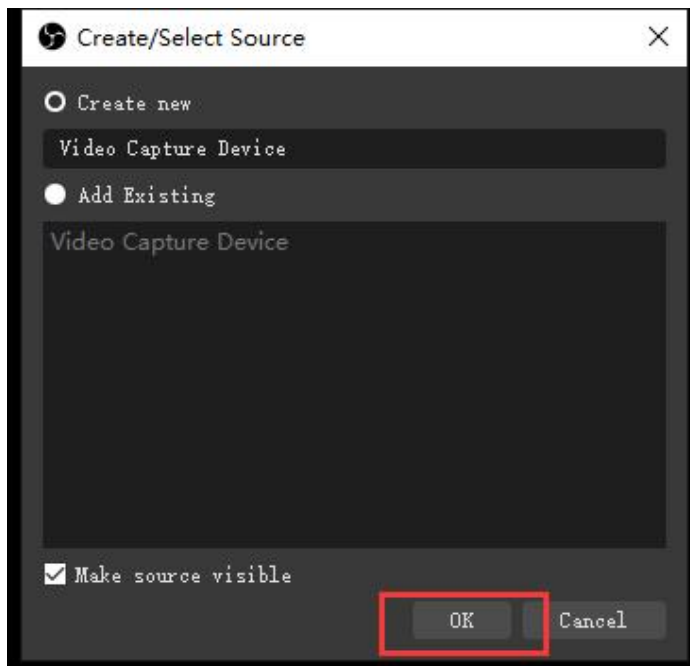


**Step 2:** Right-click “Video Capture Device” and select Properties to enter the Properties screen and select the signal source as your device. Users can set other parameter settings in the Properties page, then click OK.


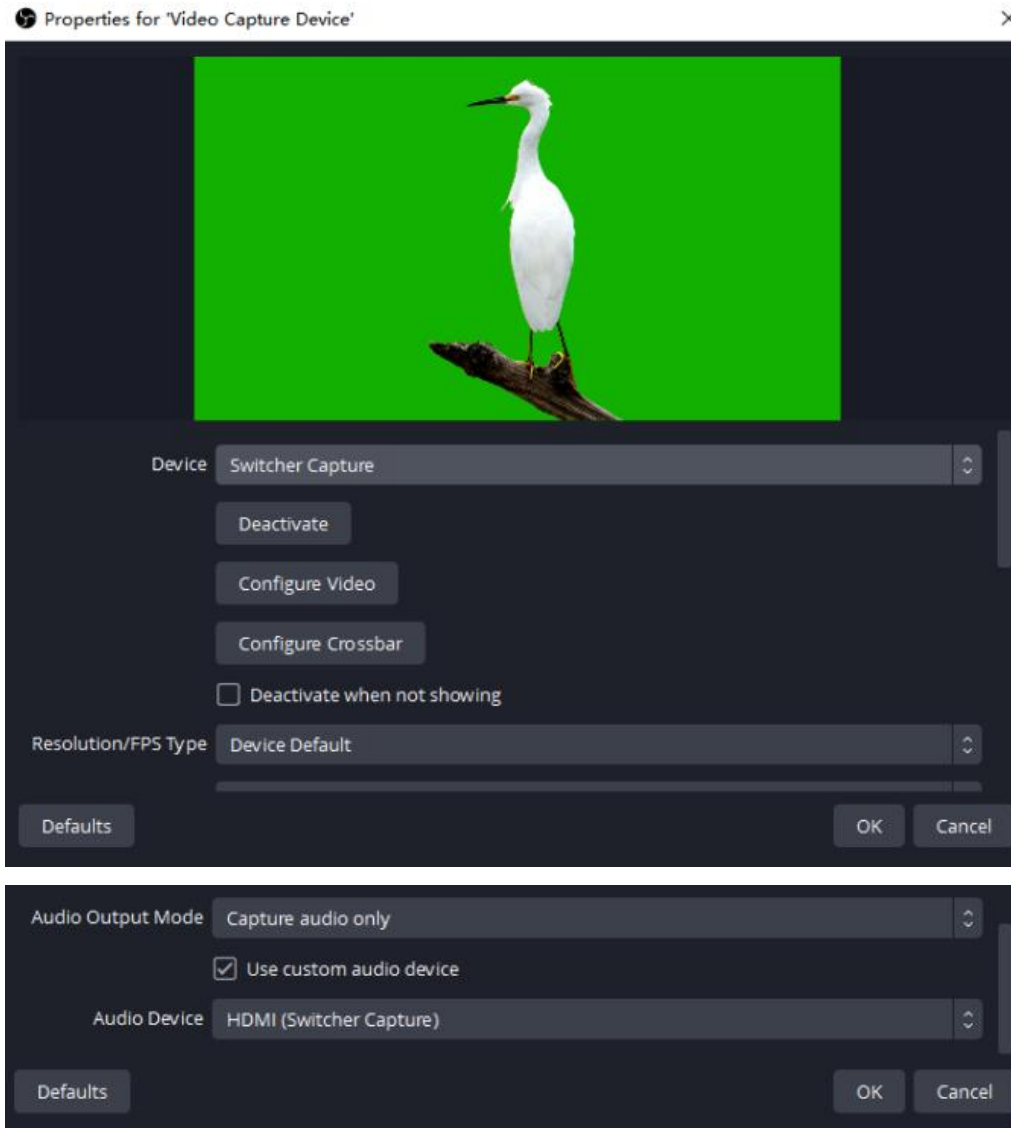


**Step 3:** Click on the Audio Settings icon to set the audio as shown in the picture. Then enter Properties and select Device.



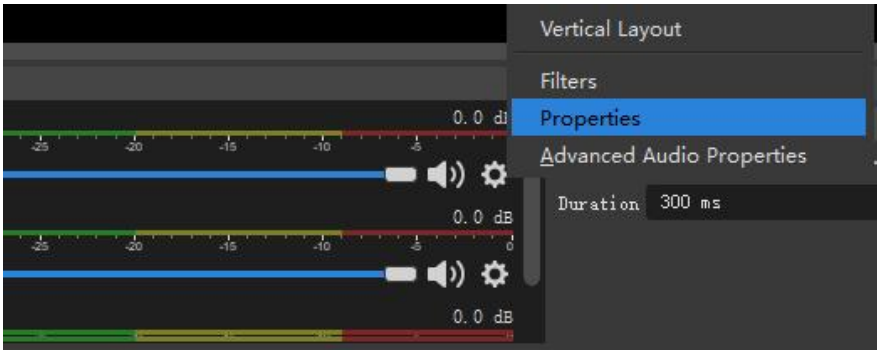

**Step 4:** Go to “Advanced Audio Properties” to modify settings about volume, balance, audio monitoring, and audio tracks.

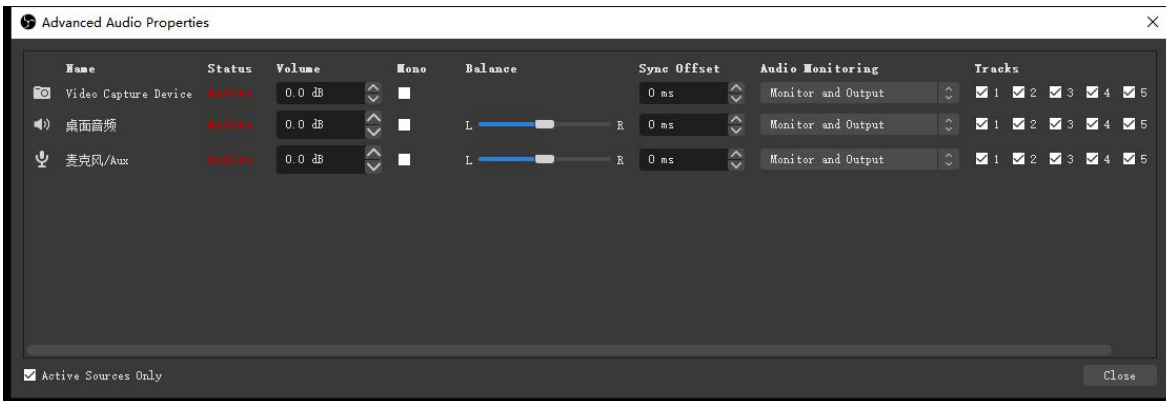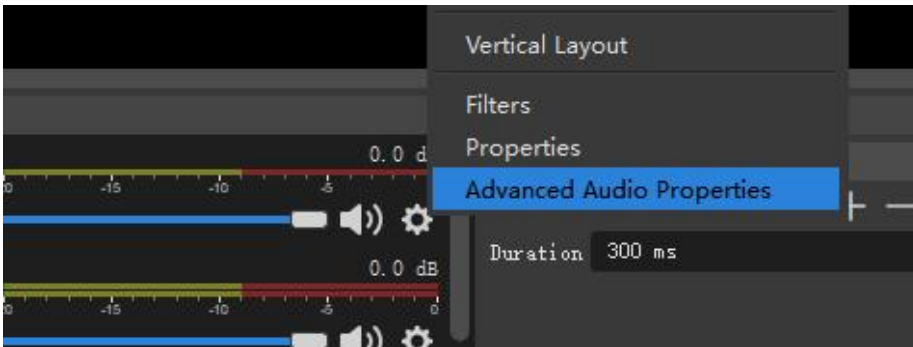

**Step 5:** Set the output resolution. (HDMI output resolution will change according to USB output).

